

OmniTetra

Extend your content across four displays with ease using Omni Tetra 1 TX to 4 RX solution.



Multi-interface support



Real-time video monitoring



Smart Channel Switching



Ultra-long-distance transmission



Ultra-low latency



OTA Cloud updates

Omni Tetra Transmitter

HDMI loopback for zero-delay real-time viewing.
Intelligent channel switching mechanism for enhanced signal stability.



Omni Tetra Receiver

Ultra-long-range reception, surpassing up to 300 meters.
Cloud Firmware Updates, keep staying latest version with OTA updates.



Multi-interface support
Compatible with HDMI, Type-C DP.



Real-time video monitoring
Supports HDMI Loopback, enabling zero-delay real-time monitoring.



Smart Channel Switching
Intelligent Channel Switching functionality.



Ultra-long-distance transmission
Transmission up to 300 meters, enabling visuals to traverse greater distances.



Ultra-low latency
Latency less than 60 milliseconds, ensuring a seamless video transmission experience.




OTA Cloud updates
Supports OTA cloud updates, allowing for real-time updates to the latest firmware version.

Specifications

Omni Tetra Transmitter

Model	EZCast Omni Tetra Transmitter T-1
Network	WIFI 5GHz
Interface	HDMI/Type-C DP
Max Resolution	1920 x 1080p
Function	1 to 4 Screen Mirror, Extend, HDMI loopback
Power	DC 5V2A

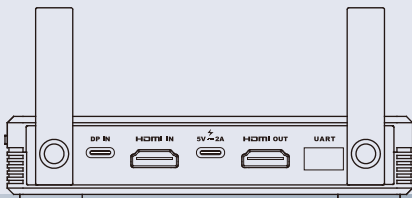

Omni Tetra Receiver

Model	EZCast Omni Tetra Receiver R-1
Network	WIFI 5GHz
Interface	HDMI
Max Resolution	1920 x 1080p
Function	1 to 4 Screen Mirror, Extend
Power	DC 5V1A

